



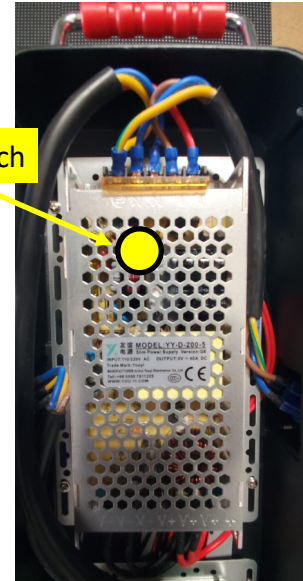

When Testing cabinets in a video-wall disconnect all the CAT 5  
Please be aware of the **LIVE 220/100 Volts circuit**


1.- Check for GREEN led in power supply , if LED is not lit , check for 220/110 Switch , the switch should be in 110/115 .

If Led is off , **replace power supply.**

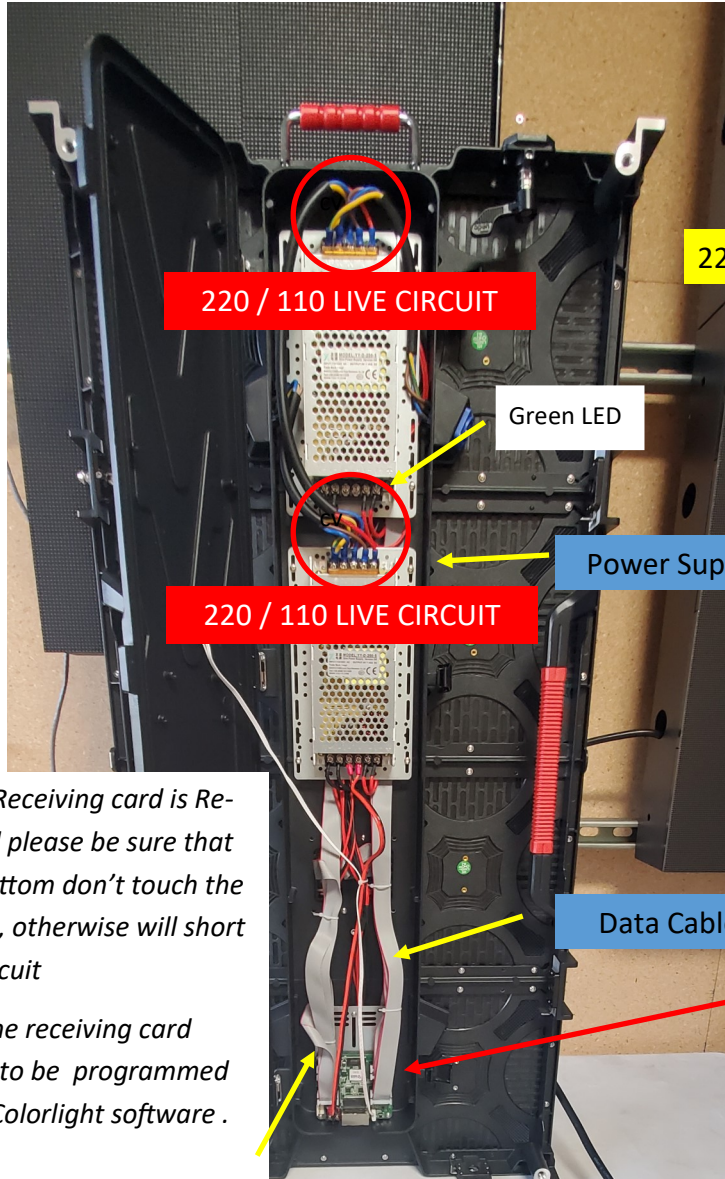

220 / 110 switch

Power supply is 5 Volts 40 AMP DC


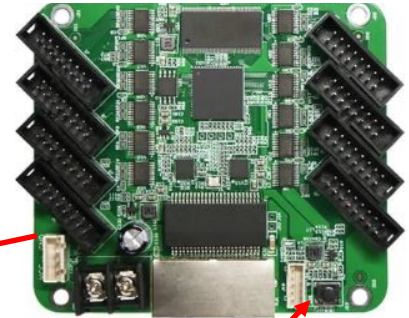


Data Cables

*If the Receiving card is Replaced please be sure that the bottom don't touch the metal , otherwise will short the circuit*

*Also the receiving card needs to be programmed with Colorlight software .*

2.- Press "TEST" bottom to enter cabinet in "TEST" mode , this setting is very useful to check for bad pixels and bad modules , as well as bad data cable .

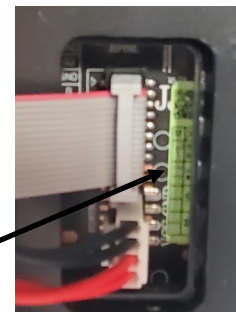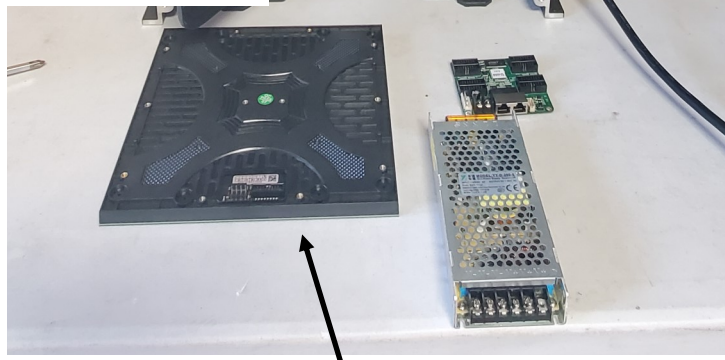

3.- To replace Modules, please disconnect power , there's 10 Philips screws . Also the modules are LEFT and RIGHT , check the sticker color near the data connector .